


# CONTROLLED ENVIRONMENT

# LIGHTHOUSE

## CONTROLLED ENVIRONMENT

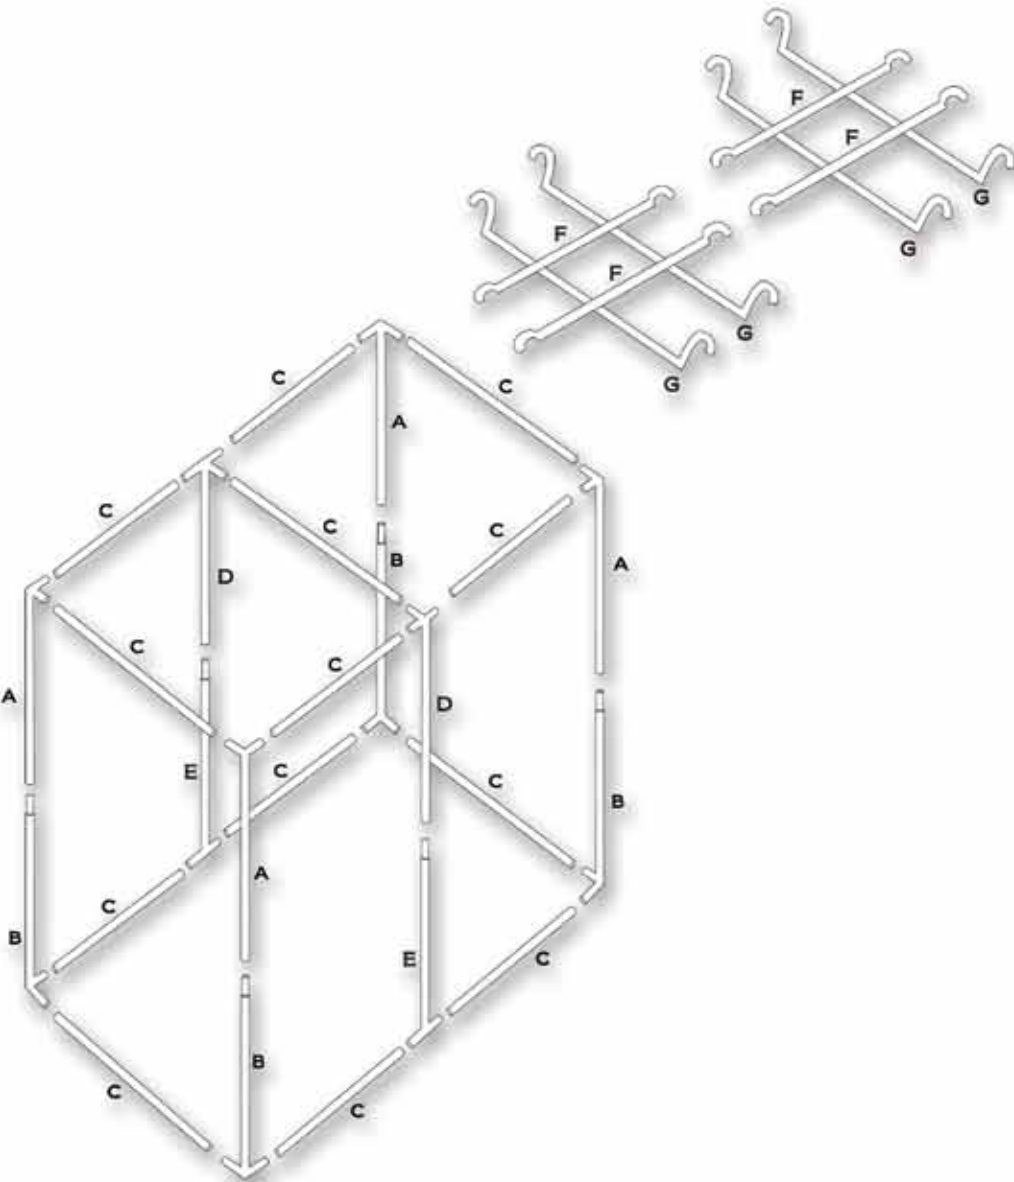

# LIGHTHOUSE

CONTROLLED ENVIRONMENT

ASSEMBLY INSTRUCTIONS

Assemble all **A** (corner poles), **D** (center-top poles) and **C** (connecting poles) as shown in the diagram. **A & D** poles have a female end. Set the half assembled frame aside.


Assemble all **B** (corner poles), **E** (center-bottom poles) and **C** (connecting poles) as shown in the diagram. **B & E** poles have a male end.

Lift up the first section, turn it over and insert the 4 **A** poles into the 4 **B** poles, and the 2 **D** poles into the 2 **E** poles to complete the frame assembly. (See picture 1)

Locate the 8 ceiling cross-members. There are 4 with taller hooked ends and 4 with shorter hooked ends. The 4 cross-members with taller hooked ends go onto the top of the frame first. Next put the remaining 4 cross-members onto the top of the frame so the 8 cross-members form 2 # patterns. See pole diagram

Unfold your Silver Edition canvas and unzip the main zipper completely. This is a long zipper that will completely open up the tent, top and bottom. Unzipping leaves the tent almost in two pieces.

Find the top of the tent canvas. The top of the tent canvas has a vent duct opening. (The bottom of the tent canvas has the half circle vents.) Start covering the frame with the top of the canvas. Using two people will make this job easier. Slide some of the top of the canvas onto the top of the frame on one side and then move to the other side and slide a bit more. (See picture 2)

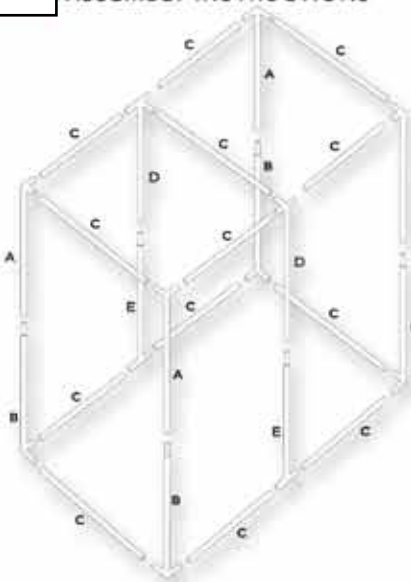

Keep sliding the canvas onto the frame until the top of the canvas is pulled squarely over the top of the frame. Make sure that all 4 corners of the canvas are pulled down squarely over each corner of the frame. (See picture 3)

Slide the bottom of the canvas under the frame until it reaches all four bottom frame corners. Making sure that each corner is squarely pulled onto the frame will insure proper installation and avoid any zipper tears later. (See picture 4)



Lay the second floor into the tent bottom and attach the 6 Velcro straps to all 6 bottom poles to keep it in place. (See picture 5)



Zip the main zipper all the way around the tent to close the tent. Assembly is now complete. (See picture 6)

There are 4 Velcro straps to use to hang a fan and a filter from the ceiling grid.

There are multiple duct outlets for ducting from 4 – 8.5 inches in diameter. If running a duct through the tent wall or ceiling, pull the double vent socks in opposite directions to have one vent sock inside the tent and another facing outwards. Run the ducting through the socks and tighten the draw strings to provide a light-tight fit. If vents aren't being used, tie the draw strings around the vent material itself while grasping the vent sock in your hand as though you are closing your fist.

This will keep the vent sock closed.

The lower, semi-circle main air vents can be kept open by rolling them tightly. Once at the open position, they will stick to the tent by Velcro already attached and in place.



7